



How to change rear
brake caliper on
Mercedes W211 –
replacement guide

VIDEO TUTORIAL



i Important!

This replacement procedure can be used for:

MERCEDES-BENZ S-Class Saloon (W221) S 350 BlueTec (221.026, 221.126),
 MERCEDES-BENZ E-Class T-modell (S211) E 220 T CDI, MERCEDES-BENZ E-Class
 Saloon (W211) E 220 CDI, MERCEDES-BENZ SL (R230) 500 5.0 (230.475),
 MERCEDES-BENZ E-Class Saloon (W211) E 320 (211.065), MERCEDES-BENZ E-Class
 Saloon (W211) E 500 (211.070), MERCEDES-BENZ E-Class Saloon (W211) E 240
 (211.061), MERCEDES-BENZ E-Class Saloon (W211) E 270 CDI (211.016),
 MERCEDES-BENZ E-Class T-modell (S211) E 240 T (211.261), MERCEDES-BENZ E-
 Class T-modell (S211) E 320 T (211.265), MERCEDES-BENZ E-Class Saloon (W211) E
 320 4-matic (211.082), MERCEDES-BENZ E-Class Saloon (W211) E 200 CDI (211.004),
 MERCEDES-BENZ E-Class Saloon (W211) E 200 Kompressor (211.042), MERCEDES-
 BENZ E-Class Saloon (W211) E 320 CDI (211.026), MERCEDES-BENZ E-Class T-
 modell (S211) E 200 T Kompressor (211.242), (+ 62)

The steps may slightly vary depending on the car design.

REPLACEMENT: BRAKE CALIPER – MERCEDES W211. TOOLS YOU NEED:



- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- Flare nut spanner №14
- Combination spanner #10
- Drive socket # 8
- Torx bit T40
- Wheel impact socket #17
- Ratchet wrench
- Torque wrench
- Flat Screwdriver
- Round-nose pliers
- Crow bar
- Brake hose clip
- Brake bleeder kit
- Wheel chock

BUY TOOLS


Replacement: brake caliper – Mercedes W211. AUTODOC experts recommend:

- The replacement procedure is identical for the left and right brake calipers on the same axle.
- All work should be done with the engine stopped.

REPLACEMENT: BRAKE CALIPER – MERCEDES W211. USE THE FOLLOWING PROCEDURE:

1

Open the bonnet. Unscrew the brake fluid reservoir cap.

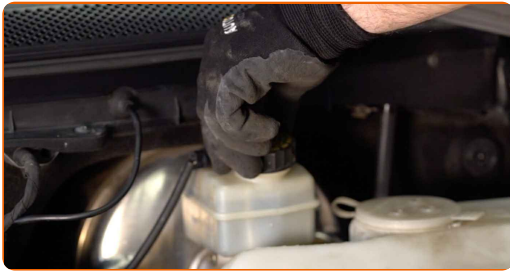


2

Secure the wheels with chocks.




3

Loosen the wheel mounting bolts. Use wheel impact socket #17.

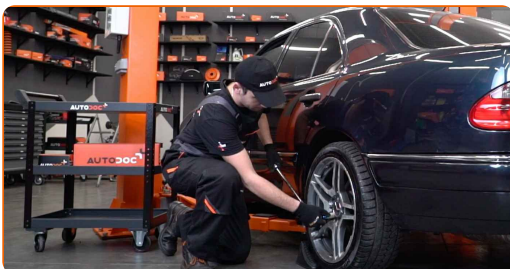


4

Raise the rear of the car and secure on supports.

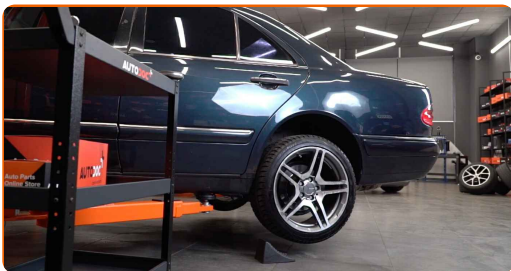

5

Unscrew the wheel bolts.

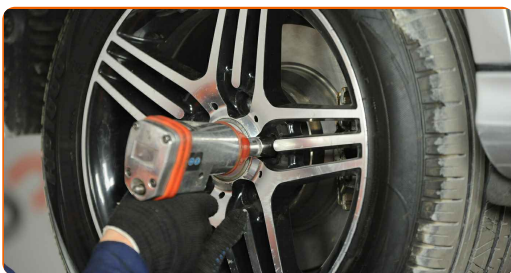

Replacement: brake caliper – Mercedes W211. AUTODOC recommends:

- To avoid injury, hold up the wheel when unscrewing the bolts.


6

Remove the wheel.



7

Detach the brake caliper retaining spring. Use a flat screwdriver.

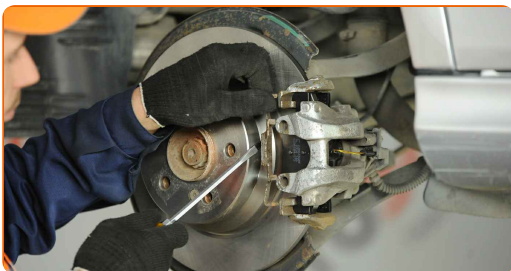

8

Disconnect the brake pads wear sensor. Use round-nose pliers.




Please note!

- Some cars are not equipped with the brake pad wear sensor.

9

Unscrew the ABS cable holder. Use a drive socket #8. Use a ratchet wrench.

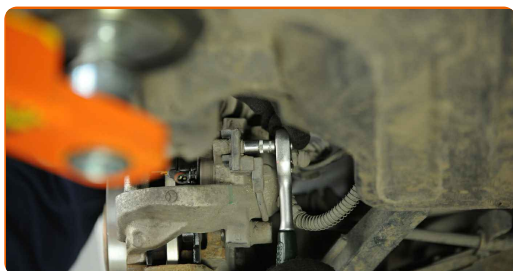

10

Detach the ABS wiring harness bracket.




11

Remove the dust boot caps of the brake caliper guide pins.


12

Clean the brake caliper fasteners. Use a wire brush. Use WD-40 spray.

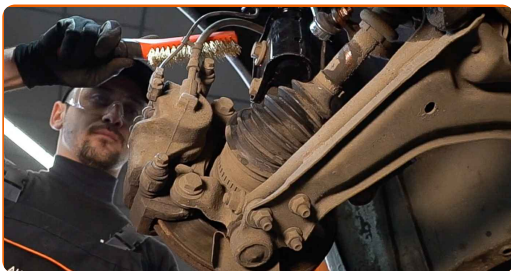

13

Unscrew the brake caliper fastening. Use Torx T40. Use a ratchet wrench.

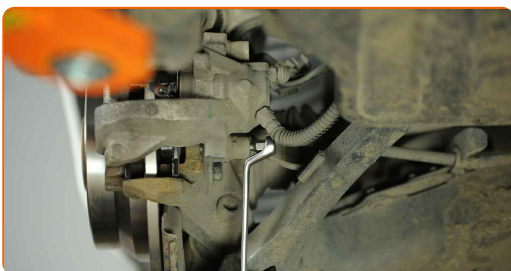


14

Remove the guide pins from the brake caliper.



15

Spread the brake pads. Use a crowbar.

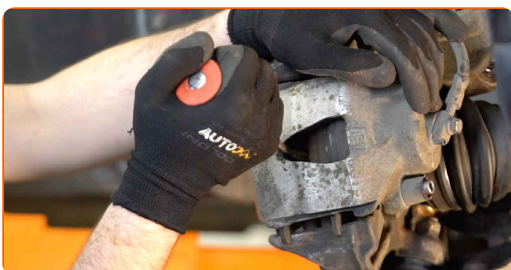

16


Clean the area where the brake hose is connected to the caliper, and the guide pins area. Use a brake cleaner.

AUTODOC recommends:

- Replacement: brake caliper – Mercedes W211. After applying the spray, wait a few minutes.

17

Clamp the brake hose off using a brake hose clamp.

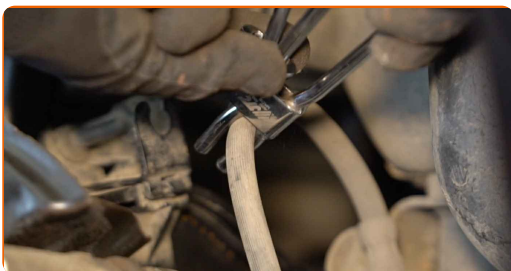


18

Loosen the brake hose fastening. Use a flare nut spanner #14.



19

Remove the brake caliper.

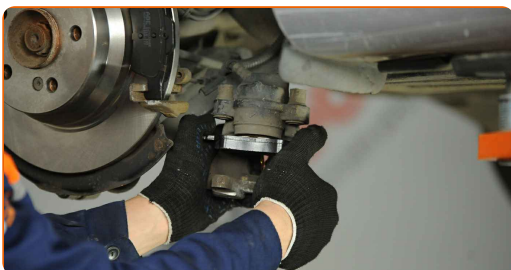

Replacement: brake caliper – Mercedes W211. Professionals recommend:

- When replacing the brake caliper, it is recommended to check the brake hose for damages and, if necessary, to replace it with a new one.
- When replacing a brake caliper it is recommended to replace brake pads, check the state of the brake discs and replace them with new ones if necessary.
- Check the brake caliper bracket, brake caliper guide pins and boots. Clean them. Replace, if necessary.
- Don't press the brake pedal after the brake caliper has been removed. As a result, the piston can fall out from the brake cylinder, and brake fluid leakage and depressurization of the system may occur.


20

Remove the brake pads.



21

Unscrew the brake hose from the brake caliper. Use a flare nut spanner #14.

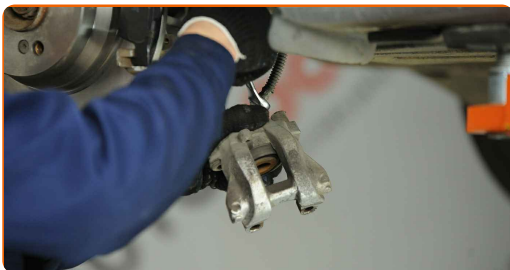

22 Disconnect the brake hose.




23 Treat the brake hose. Use a brake cleaner.

Replacement: brake caliper – Mercedes W211. AUTODOC experts recommend:

- After applying the spray, wait a few minutes.

24 Install and fix the brake hose into a new caliper. Use a flare nut spanner #14.

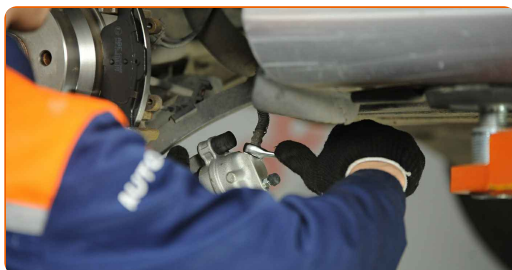


25 Install the brake pads.



Replacement: brake caliper – Mercedes W211. Tip:


- If going to use the old brake pads, clean them.

26 Install the brake caliper and fix it.

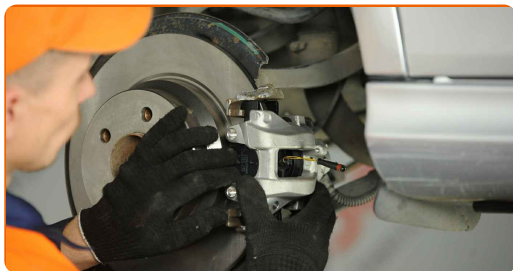

27 Screw in the guide pins.

28 Tighten the brake caliper fasteners. Use Torx T40. Use a torque wrench. Tighten it to 28 Nm torque.

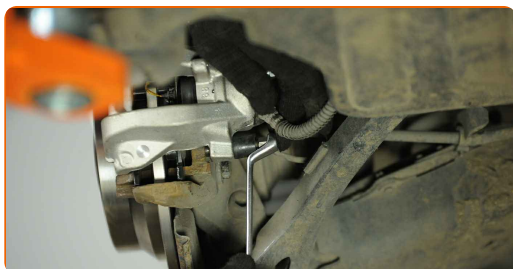

29 Install the dust boot caps of the brake caliper guide pins.




30 Tighten the fastener connecting the brake pipe to the brake caliper. Use a flare nut spanner #14. Use a torque wrench. Tighten it to 18 Nm torque.




31 Remove the brake hose clamp.



32 Fasten the ABS wiring harness bracket.

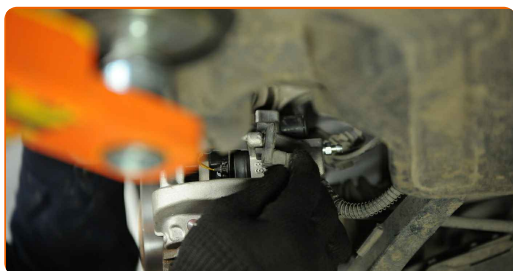

33 Tighten the ABS cable holder. Use a drive socket #8. Use a ratchet wrench.

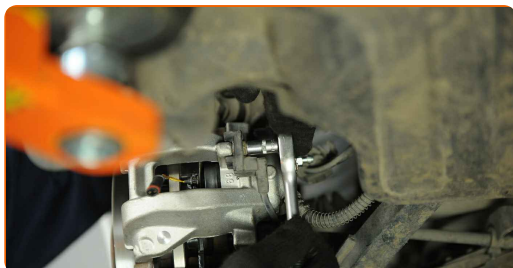

34 Connect the brake pads wear sensor. Use round-nose pliers.



35 Install the brake caliper retaining spring. Use round-nose pliers.



36 Connect the brake bleeder kit to the brake bleeder screw.


37 Undo the brake bleeder screw. Use a combination spanner #10.



38 Bleed the brake caliper system. Without starting the engine, press the brake pedal several times until you feel significant resistance.



39 Tighten the brake caliper bleed screw. Use a combination spanner #10. Use a torque wrench. Tighten it to 10 Nm torque.

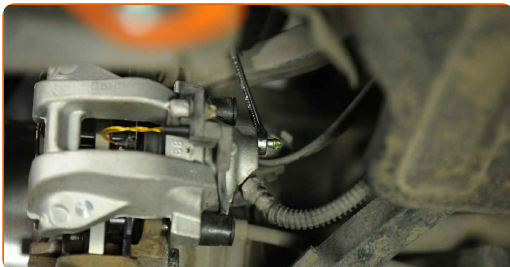

40 Disconnect the brake bleeder kit.

41 Clean dirt from the brake hose bolt. Use a brake cleaner.

AUTODOC recommends:

- Replacement: brake caliper – Mercedes W211. After applying the spray, wait a few minutes.

42

Treat the surface where the brake disc contacts the wheel rim. Use copper grease.



43

Clean the brake disk surface. Use a brake cleaner.

Replacement: brake caliper – Mercedes W211. Tip from AUTODOC experts:

- After applying the spray, wait a few minutes.

44

Install the wheel.



AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while screwing in the fastening bolts on the car. Mercedes W211


45 Screw in the wheel bolts. Use wheel impact socket #17.



46 Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #17. Use a torque wrench. Tighten it to 120 nm torque.



47 Remove the jacks and chocks.

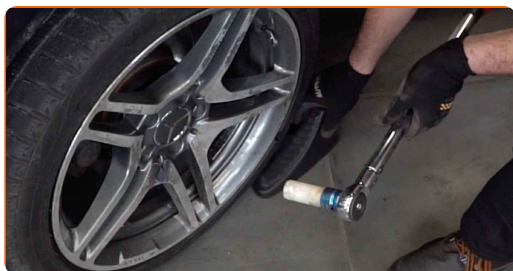

AUTODOC recommends:

- Important! Replacement: brake caliper – Mercedes W211. Check the brake fluid level in the reservoir and top up if necessary.

48

Tighten the brake fluid reservoir cap. Close the hood.



Replacement: brake caliper – Mercedes W211. Tip from AUTODOC:

- Without starting the engine, press the brake pedal several times until you feel significant resistance.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR MERCEDES

BRAKE CALIPER: A WIDE SELECTION

CHOOSE CAR PARTS FOR MERCEDES W211

BRAKE CALIPER FOR MERCEDES: BUY NOW

BRAKE CALIPER FOR MERCEDES W211: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.